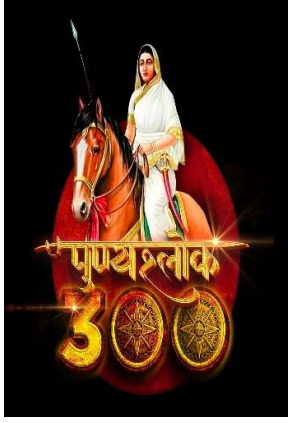


|  |  |  |
|--|--|--|
|  <p><b>MAHATRANSCO</b><br/>Maharashtra State Electricity Transmission Co. Ltd.</p> | <p align="center"><b>MAHARASHTRA STATE ELECTRICITY<br/>TRANSMISSION COMPANY LIMITED</b></p> <p align="center"><b>Government of Maharashtra (Undertaking)</b></p> <p align="center"><b><u>CIN No. U40109MH2005SGCI53646</u></b></p> <p align="center">From Executive Engineer,<br/>400KV R.S. (O&amp;M) Div. Jejuri.<br/>A/P: Jejuri. Tal: Purandhar<br/>Dist: Pune, Pin code-412303<br/><b>☎ 7447440530 e-mail: <a href="mailto:ee6160@mahatransco.in">ee6160@mahatransco.in</a></b></p> |  |
|--|--|--|

**EE/400KV/R.S./DIV/JEJURI/ 389**

**DATE: 07.10.2025**

**ENQUIRY**  
**(Through MSETCL webpage)**  
**TO WHOM SO EVER IT MAY CONCERN**

Dear Sir,

The budgetary offers through mail are invited Work of Annual maintenance of Air Conditioning system (Air Handling unit of 11-ton unit, make-Carrier Aircon Ltd),15000CFM Boosters (make not available) & 2T Split A.C(make-Carrier) at 400 kV RS Jejuri. as per Schedule 'A'. You are requested to quote your lowest rate for the said work in schedule "A".

**Scope of Work:** Mentioned in Schedule 'A'

**Schedule 'A'**

| Sr. No.  | Particular  | Unit | Per Unit Rate excluding GST |
|----------|---|------|-----------------------------|
| <b>A</b> | <b>Supply Part of Air Conditioning system (Air Handling unit of 11 ton unit) includes</b> |      |                             |
| 1        | Contact of Compressor   | EA   |                             |
| 2        | Expansion Valve   | EA   |                             |
| 3        | Freon Gas R-22  | kg   |                             |
| 4        | Compressor -V Belt  | EA   |                             |
| 5        | Air Conditioner Catch Well Filter   | EA   |                             |
| 6        | Air Conditioner Relay   | EA   |                             |
| 7        | A.C. O/D unit Fan Motor   | EA   |                             |
| 8        | A.C. Fan Blade  | EA   |                             |
| 9        | A.C. LP/HP Pressure Switch  | EA   |                             |
| 10       | A.C. Single Phase Preventer   | EA   |                             |
| 11       | 11 Ton I/D Unit Blower (Aluminum)   | EA   |                             |
| 12       | Bearing   | EA   |                             |
| 13       | 3-5 A Relay   | EA   |                             |
| 14       | T Window A.C. Condenser coil set  | EA   |                             |

|          |   |                 |  |
|----------|---|-----------------|--|
| 15       | Condenser Motor 250-300V AC   | EA              |  |
| 16       | ½HP 1Ø 50Hz Motor   | EA              |  |
| 17       | ¾" Cu Pipe - A.C.   | EA              |  |
| 18       | 3P 415V 250A Power Contactor (CK09BE311)  | EA              |  |
| 19       | Electrical panel for 11 Ton AC plant  | EA              |  |
| 20       | 4C*2.5 Sqmm, copper flexible cable  | Mtr             |  |
| 21       | 3-Ph, 5.5 Ton Compressor  | EA              |  |
| 22       | 8" Pulley   | EA              |  |
| 23       | Pedestal Bearing (P210)   | EA              |  |
| <b>B</b> | <b>Supply Part of 2T Split A.C includes</b>   |                 |  |
| 1        | Split A.C. Fan Blower   | EA              |  |
| 2        | Split A.C. PCB  | EA              |  |
| 3        | Split A.C. I/d Fan Motor  | EA              |  |
| 4        | 2T Split A.C. O/d unit Fan Motor  | EA              |  |
| 5        | 2T A.C. Fan Blade   | EA              |  |
| 6        | 2T Split A.C. Compressor  | EA              |  |
| 7        | Split A.C. Running Capacitor  | EA              |  |
| <b>C</b> | <b>Services of Air Conditioning system (Air Handling unit of 11 ton unit) includes</b>  |                 |  |
| 1        | Maintenance of A.C. Plant which includes Half Yearly maintenance of Central ACs, including cleaning of units, cooling coil, condenser coil, drain pipe, filters. Checking & Rectification in control panel, switch operation, motor operation, gas pressure, Gas Refilling, leakage, vibration etc. Checking of cooling efficiency , LP&HP Pressure switch, control Panel, Compressor terminal Clip, insulation on copper pipe and other general check up,vibration on outdoor unit and servicing in all respect of 6 Nos AC units. | Rate/Visit (EA) |  |
| 2        | Arresting of Gas Leakage & Filling of Gas   | EA              |  |
| 3        | Servicing of 11 Ton I/D Blower  | EA              |  |
| 4        | Servicing of 11 Ton I/D Machine pulley  | EA              |  |
| 5        | Replacement of contactor  | EA              |  |
| 6        | Servicing of 11 Ton I/D machine connecting shaft  | EA              |  |
| 7        | Fixing of pedestal Bearing  | EA              |  |
| <b>D</b> | <b>Services of 2T Split A.C. includes</b>   |                 |  |
| 1        | Repairing & Servicing of of 2T Air Conditioner per month.   | EA              |  |
| 2        | Arresting of Gas Leakage & Filling of Gas   | EA              |  |
| 3        | Replacement of contactor  | EA              |  |
| <b>E</b> | <b>Services of 15000 CFM Booster includes</b>   |                 |  |
| 1        | Servicing of 3-Ph 15Hp motor  | EA              |  |

|   |                                |    |  |
|---|--------------------------------|----|--|
| 2 | Booster blower work            | EA |  |
| 3 | Installation of 8" pulley      | EA |  |
| 4 | Servicing of Impeller          | EA |  |
| 5 | Shafting work with fabrication | EA |  |
| 6 | Canvas Connection work         | EA |  |

- 1) **Please note that said budgetary offer is only for estimate purpose & not considered for any bidding & No work order will be issued based on this Enquiry.**
- 2) All interested bidders are requested to submit their best reasonable budgetary offer for above works on Email ID: [ee6160@mahatransco.in](mailto:ee6160@mahatransco.in) upto 17:00 Hrs on dtd.14.10.2025

Thanking you,

Yours Faithfully,

-Sd-

S.V. Kulkarni  
**Executive Engineer.**  
**400KV RS DIV Jejuri.**