

MAHARASHTRA STATE ELECTRICITY TRANSMISSION CO. LTD.
(CIN No. U40109MH2005SGC153646)

The Executive Engineer, EHV O&M Division, Kolhapur.
Near Market Yard, Bapat Camp, Kolhapur-416005
Phone:- (O) 0231)-2651529, 2680171, Email:-ee3210@mahatransco.in

EE/EHVO&M/DN/KOP/T/LP/ 1868

Date:03.11.2025.

Sub :E- Enquiry for AMC servicing, repair of station transformer at various EHV substation under EHV O&M Dn, Kolhapur. .

Dear Sirs,

Sealed and super scribed quotations are invited from the experienced agencies for the above said work on item rate basis, so as to reach the office of Executive Engineer, MSETCL, EHV O&M Division, Bapat Camp, Kolhapur, **upto::10.11.2025 @ 15:00 Hrs.**

Terms & Conditions::

1	PRICES :	The rates will be accepted as per Schedule A with work at variuos substation under EHV O&M Division, Kolhapur.
2	SCOPE OF THE WORK :	The work includes as per schedule A & as per the instruction of concern substation In-charge. Transportation of material within 20 KMs will be done by MSETCL, beyond that transportation will be in the scope of agency. Before starting of work, joint measurement should be done with substation In-charge. Oil required for the job will be provided by MSETCL. Entire scope of the work to be completed within 45 days from the Dt of handing over of T/F. Repair work to be guaranteed for 2 years from the Dt of handing over of the T/F to MSETCL. If the T/F failed within guarantee period, agency has to repair the same within 15 days from the Dt of handing over and guarantee will be continues for further 2 years from re repair.
3	TAXES :	Rates are inclusive of all the taxes. 1% labour cess & 2 GST TDS will be deduct from your bills.
4	SECURITY DEPOSIT :	Security Deposit 5% of the order value submit to this office in form of Cash/BG/DD/Chq. The security deposit will be refunded only after completion of guarantee period & NOC from respective substation In-charge. If BG is to be submitted Govt stamp duty of 0.1% of SD amount is to be paid.
5	SPECIFICATION :	Work should be carried out as per specification in enclosed Schedule 'A'
6	RISK PURCHASE:	In case of failure to execute the order, the same will be purchased from other agency at our description and difference in cost will be recovered from the tenderer in addition to forfeiture of S.D.
7	QUANTITY & QUALITY :	Quantity & Quality as per schedule A & Specifications.
8	INCOME TAX :	As per govt. rule Income tax at source will be recovered from your bill as per rules. Your Income tax No. may be informed to this office


9	TERMS OF PAYMENT :	The bills should be submitted in triplicate to Concern In-charge. 100% payment will be made on production of following document & completion of ERP activities. A) Invoice B) Work completion report/ MOM. C) Guarantee Certificate. D) Delivery challan.
10	WORKING PERIOD :	The work should be completed within 45 days from the date of handing over of site.
11	PENALTY FOR LATE DELIVERY :	In case, work is not completed in stipulated time i.e within 45 days from the Dt. Of handing over of the T/f, the contractor shall be liable to pay penalty at ½ % per week on bill amount, subject to maximum 10% of the order value. If the T/F failed within guarantee period, and not repaired within 15 days from the Dt of handing over, then penalty @ 1% of the work order value per week will be implemented.
12	DEDUCTION :	Any amount or amounts which become payable by the contractor to the MSETCL under particular contract may be deducted by the purchaser from any amount / amounts due or becoming due by him to the contract under the same or any other contract.
13	JURISDICTION :	All disputes or difference arising out of in connection with the contract, if concluded, shall be subject to the exclusive jurisdiction of Kolhapur court.
14	PAN No./ GST :	Please mentioned PAN No./ GST Registration No. if applicable / PF No. & ESI No. if applicable on the bill otherwise bill will be kept pending.
15	TRANSPORTATION :	Transportation of Station Transformer up to 20 KMs will be in the scope of MSETCL, beyond that transformer will be transported by the agency.
16	GENERAL T&C :	You are also deemed to be fully aware of the Company's general conditions of contract for work and any ignorance of any of the conditions will not exempt you from your liability to abide by the same.
17	SUBLETTING :	You shall not sub-contract without the prior written permission of the company.
18	GUARANTEE PERIOD	Repair of station transformer should be guaranteed for 2 years from the Date of handing over to MSETCL.
19	AGREEMENT BOND	Submit agreement bond on stamp paper of Rs. 500/- to this office.
20	Estimated Amt	Total Estimated Amount limited upto Rs. 3,00,000/-(Incl. Of all Taxes)
21	Validity of work order	Validity of work order will be 12 months from the Dt of issue of work order.
22	Scrap	Any scrap removed during the repair and maintenance will be retained by the agency.

**Executive Engineer,
EHV O&M Division, Kolhapur**

Note Following documents should be Submitted with quotations only :

Sr. No.	Particular
1	Registration under GST
2	Proof regarding Income Tax Return for the FY 2023-24
3	Certificate having successfully executed repair of station transformer related similar type of work etc will be considered from the rank of Executive Engineer or above.
4	PAN Card copy.

**Executive Engineer,
EHV O&M Division, Kolhapur**

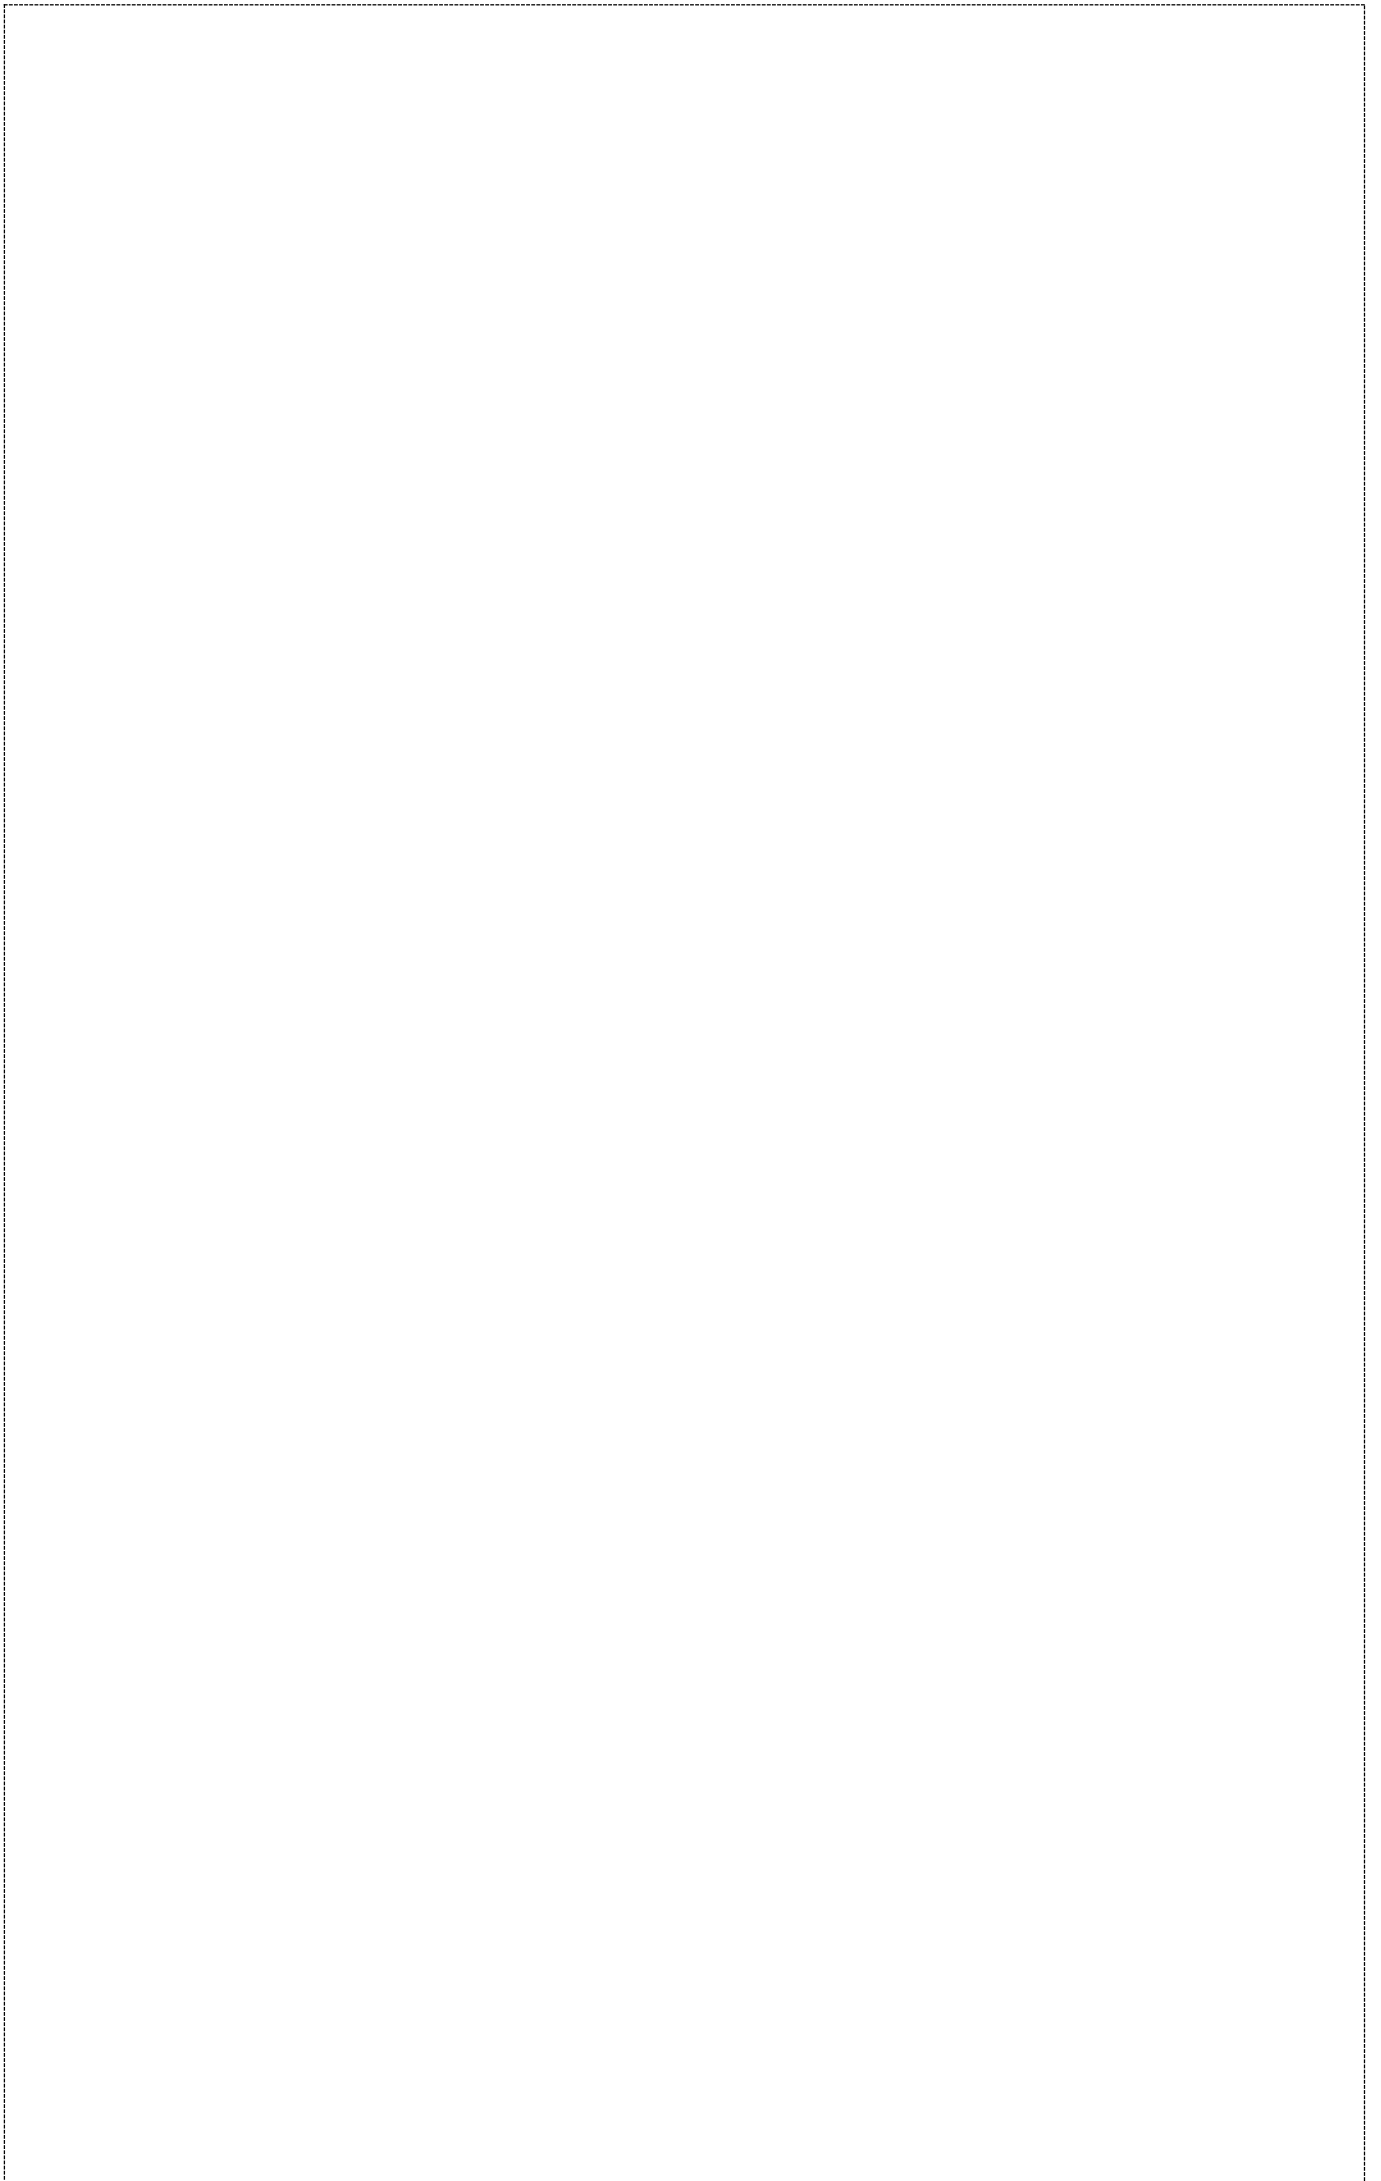

AMC servicing, repair of station transformer at various EHV substation under EHV O&M Division Kolhapur.

Schedule A

Sr. No:-	Particulars of Work	Unit	Unit rates Excl. of LC & GST	Labour cess @1% on (A)	Rates Incl. of LC	GST @18% on Rates Incl. of LC	Unit rates +LC+GST	Quote Rates in % Basis Above/ Below/ At Par
A	Repair & maintenance of 33/0.415kV, 200KVA & 100KVA station transformer							
1	Charges for rewinding & repair of 200KVA (33/0.4kV) station transformer : Dismantling of transformer, rewinding of HV coils using new conductor, Reinsulation of LV Assly, Oven Drying, Tanking, Repairing , Repl. of all HV & LV rods & testing etc.	No.	82500.00	825.00	83325.00	14998.50	98323.50	
2	Charges for rewinding & repair of 200KVA (11/0.4kV) station transformer : Dismantling of transformer, rewinding of HV coils using new conductor, Reinsulation of LV Assly, Oven Drying, Tanking, Repairing , Repl. of all HV & LV rods & testing etc.	No.	72500.00	725.00	73225.00	13180.50	86405.50	
3	Charges for rewinding & repair of 100KVA (33/0.4kV) station transformer : Dismantling of transformer, rewinding of HV coils using new conductor, Reinsulation of LV Assly, Oven Drying, Tanking, Repairing , Repl. of all HV & LV rods & testing etc.	No.	70000.00	700.00	70700.00	12726.00	83426.00	
4	Charges for rewinding & repair of 100KVA (11/0.4kV) station transformer : Dismantling of transformer, rewinding of HV coils using new conductor, Reinsulation of LV Assly, Oven Drying, Tanking, Repairing , Repl. of all HV & LV rods & testing etc.	No.	61500.00	615.00	62115.00	11180.70	73295.70	
5	Ovening & filtration of station TF (Oil will be provided by MSETCL)	No.	25000.00	250.00	25250.00	4545.00	29795.00	
6	Providing & Fixing of Gasket, breather & Silica Gel of T/F along with filtration 200KVA T/F (oil will be provided by MSETCL)	No.	22000.00	220.00	22220.00	3999.60	26219.60	
7	Providing & Fixing of Gasket, breather & Silica Gel of T/F along with filtration 100KVA T/F (oil will be provided by MSETCL)	No.	22000.00	220.00	22220.00	3999.60	26219.60	

Sr. No:-	Particulars of Work	Unit	Unit rates Excl. of LC & GST	Labour cess @1% on (A)	Rates Incl. of LC	GST @18% on Rates Incl. of LC	Unit rates +LC+GST	Quote Rates in % Basis Above/ Below/ At Par
8	Providing & Fixing of HV bushing 200KVA (33/0.4kV) station T/F	No.	12500.00	125.00	12625.00	2272.50	14897.50	
9	Providing & Fixing of HV bushing 200KVA (11/0.4kV) station T/F	No.	10500.00	105.00	10605.00	1908.90	12513.90	
10	Providing & Fixing of HV bushing 100KVA (33/0.4kV) station T/F	No.	12500.00	125.00	12625.00	2272.50	14897.50	
11	Providing & Fixing of HV bushing 100KVA (11/0.4kV) station T/F	No.	10500.00	105.00	10605.00	1908.90	12513.90	
12	Providing & Fixing of LV bushing 200KVA (33/0.4kV) station T/F	No.	7500.00	75.00	7575.00	1363.50	8938.50	
13	Providing & Fixing of LV bushing 200KVA (11/0.4kV) station T/F	No.	7500.00	75.00	7575.00	1363.50	8938.50	
14	Providing & Fixing of LV bushing 100KVA (33/0.4kV) station T/F	No.	7500.00	75.00	7575.00	1363.50	8938.50	
15	Providing & Fixing of LV bushing 100KVA (11/0.4kV) station T/F	No.	7500.00	75.00	7575.00	1363.50	8938.50	
16	Painting of 200KVA station T/F	No.	4500.00	45.00	4545.00	818.10	5363.10	
17	Painting of 100KVA station T/F	No.	4500.00	45.00	4545.00	818.10	5363.10	
18	Transportation (Incl. Loading & unloading station Transformer) 0-50 Km (Minimum charges for 50Km to be paid) - Minimum Weight of 9 MT per truck & 20 MT for Trailor to be paid	MT/ Km	29.10	0.00	29.10	1.46	30.56	

Above rates are Incl. Of LC+GST

Executive Engineer
EHV O&M Division Kolhapur