

**- OFFICE OF THE -
EXECUTIVE ENGINEER (C)**

EHV Civil Constn. Cum Maintenance Division,
Mahatransco Administration Building, first Floor,
wing no.102, Aurangabad, Ph. No. (0240) 2331429,
E-mail : ee2710@mahatransco.in CIN: U40109MH2005SGC153646



No.: EEC/EHV/CCCM/Dn./ABD//Tech/

- 5 9 8 -

Date:-

6 JUN 2019

e- Quotation Enquiry

To,

.....
.....
.....

Sub: Providing Concrete over Existing transformer plinth & Metal Spreading at 132kV Chiklalthana S/Stn. Dist. Aurangabad.

Dear Sir,

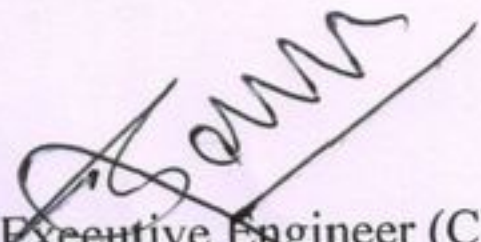
Sealed percentage rate quotations are invited from Govt. registered & experienced Contractors for the above work as per schedule enclosed. The quotation should reach to the office of Executive (Civil) EHV CCCM Division Aurangabad on or **before dated 14.06.2019 Time 16.30 Hrs.**

TERMS AND CONDITIONS:

- 1) The work should be carried out as per P.W.D. specification and instructions of the Engineer in-Charge and to the satisfaction of the undersigned.
- 2) The quantities mentioned in the attached schedule are approximate and likely to vary. However, payment will be made as per the work actually executed and measured. The rates shown in enclosed schedule B are inclusive of GST.
- 3) The work should be completed within **(15)** days from the date handing over the site, failing which the contractor shall be liable to pay as compensation an amount equal to one percent or such similar amount as the competent authority may decide of the W.O. cost for every day the work remain unfinished after due date of completion subject to the maximum 10% of the cost of the order.
- 4) The work which is of bad workmanship quality will not be measured and paid.
- 5) Contractor shall have to arrange for require cement, steel etc. at his own cost without involving any financial implications to MSETCL.
- 6) Other material such as require tools and plant will have to arrange by the contractor at his own cost.
- 7) The water arrangement will have to be made by the contractor at his own cost and it is not binding on the part of department to provide water for the work. In case in water is supplied by Department, then the water will be charged at the rate 1% of work done for water consuming item or 0.25% of total value of work order as decided by the Engineer in-charge.
- 8) The contractor will have to make good the damages if any made by him during the execution of work at his own cost
- 9) The material should be got approved prior to fixing from the Engineer in-charge.

- 10) Income Tax as per the prevailing income Tax rule and subsequent amendment thereof will be recovered at source of your bill on total value of work done for which the certificate will be issued if desired.
- 11) Contractor should submit the purchase vouchers for cement, steel with the bills invariably.
- 12) Contractor will be held responsible for accident occurred during the course of the work and will have to pay the compensation as per the act 1923 and subsequent amendment thereof.
- 13) Contractor should submit his bill in triplicate through Addl. Executive Engineer (Civil) EHV CCCM Sub-Division-I Aurangabad the undersigned. Payment will be made within 60 days period from the date of receipts of bill to this office.
- 14) The terms and conditions in the M.S.E.T. Co. Ltd. Booklet 'Tender and contract work' will stand applicable for this work.
- 15) You will have to deposit 14,500.00 (5% of quotation value) as security deposit in cash or DD of any nationalized Bank within 10 days from the date of receipt or receipt of work order, failing which EMD paid will stand forfeited.
- 16) The contractor's offer will be considered as inclusive of all taxes and charges and it will be the contractor's responsibility to pay the taxes to Government and same will not be reimbursed to the contractor.
- 17) Your own rates should be quoted in words and figures scratches and over written rates shall not be considered if not initialed.
- 18) The contractor has to pay earnest money to **Rs. 3,000.00/-** in cash/In form of DD/FDR of any Nationalized Bank in favor of Executive Engineer (C) EHV CCCM DIV. MSETC Ltd. Aurangabad. If the EMD of required amount is not found in the envelop the quotation will be rejected
- 19) The undersigned reserves the right to reject any or all quotations without assigning any reason what so ever.
- 20) GST will be recovered from your bill as per GST norms.
- 21) **Special condition:** The payment shall be effected as per fund availability. Due to shortage of fund there are chances of delay in payments for which the agency will have to bear with the Dept. No. any of claim on this account will be entertained.
- 22) The estimated cost of the work is **Rs. 2,81,667.00** only. (Inclusive of all Taxes)
- 23) The Contractor has to submit the Civil Works Registration Certificate, GST Registration and PAN card at the time offer submission as mandatory documents.

Encl: Schedule 'B'


Executive Engineer (C)
EHV CCCM Division, Aurangabad.

Copy s.w.r.s. to:

✓ The Superintending Engineer (C) EHV CCCM Circle, Aurangabad.

Copy To:

1. The Dy. Manager (F&A), EHV CCCM Division, Aurangabad.

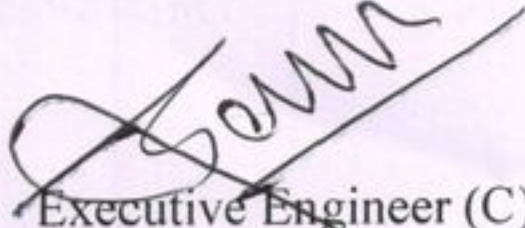
**- OFFICE OF THE -
EXECUTIVE ENGINEER (C)**

EHV Civil Constn. Cum Maintenance Division,
Mahatransco Administration Building , first Floor,
wing no.102, Aurangabad, Ph. No. (0240) 2331429,
E-mail : ee2710@mahatransco.in CIN: U40109MH2005SGC153646



Name of Work: Providing Concrete over Existing transformer plinth & Metal Spreading at 132kV Chiklalhana S/Stn. Dist. Aurangabad.

Estimated Amount: - Rs. 2,81,667.00 (Inclusive of All Taxes)


Executive Engineer (C)
EHV CCCM Division, Aurangabad.

Quotation for Works

I/We hereby quote for the execution of the specified in the above written memorandum within time specified in such memorandum at (at Figure)% above/below/Estimated Rate (in Words) percent above/Below/Estimated rate (to be struck whichever is not applicable) the estimated rates entered in schedule "B" (memorandum showing item of work to be carried out) in accordance in all instruction in writing from the Engineer – in – Charge.

I/We have read the general conditions of contracts & the conditions enumerated in the quotation and the same are binding on us.

Signature of the contractor

Full Address:

MAHARASHTRA STATE ELECTRICITY TRANSMISSION CO. LTD.

EHV CCCM Division Aurangabad.

**Name of Work: Providing Concrete over Existing transformer plinth & Metal Spreading at
132kV Chikalthana S/Stn. Distt: Aurangabad**

SCHEDULE B

Sr. No.	Particulars	Qty.	Rate	Unit	Total Amount
1	3	4	7	8	9
1	Providing and fixing in position T.M.T. bar reinforcement (Produced from iron ore and made through blast furance route as per IS 1786-2008) of various diameters for reinforced cement concrete pile caps, footings, foundation, slabs, beams, columns, canopies, stair case, newels, chajja, lintels, pardi, copings, fins, arhes etc. as per detailed designs, drawings and schedules including cutting bending, hooking the bars, binding with wires or tack welding and supporting as required complete. (From Integrated plant only) Spec No. : Bd.F.17 Page No.306.	0.70	75512.92	MT	52859.04
2	Providing and laying in situ cement concrete M-25 of trap / granite / quartzite / gneiss metal for Reinforced Cement Concrete work in foundation like raft, grillage, strip foundation and footings of Reinforced Cement Concrete columns and steel stanchion including bailing out water, formwork, compaction and finishing, curing etc. complete. (Excluding steel reinforcement and Structural steel) Spec No. : Bd.F.3 Page No.298	20.00	7256.20	Cum	145124.00
3	Providing neeru finish to plastered surfaces in all positions including scaffolding and curing etc. complete.	133.00	48.38	Sqm	6434.54
4	Providing structural steel work in rolled sections like joists, channels, angles, tees etc. as per detailed designs and drawing including fixing in position without connecting plates, braces etc. and painting complete. Spec.No.Bd.C.2 Page No.275	0.40	83796.52	MT	33518.61
5	Supplying and spreading 25 to 40 mm size machine crushed trap stone metal free from impurities as directed by Engineer – in – charge in the switchyard including conveying stacking and spreading in uniform thickness of 65 mm including all leads, loading, unloading, watering and manually compaction etc. complete. (Stack measurement will be paid)	13.00	1516.72	Cum	19717.36
6	Supplying and spreading 20 mm size machine crushed trap stone metal free from impurities as directed by Engineer – in – charge in the switchyard including conveying stacking and spreading in uniform thickness of 35 mm including all leads, loading, unloading, watering and manually compaction etc. complete. (Stack measurement will be paid)	7.00	1532.64	Cum	10728.48
7	Providing and placing in position R.C.C. collars of 800 mm dia X 600 mm length R C.. C pipe for earthing, pits including transportation etc. complete.	16.00	830.32	Nos	13285.12
	Total Rs.				281667.15


 Executive Engineer (C)
 EHV CCCM Division
 MSETCL Aurangabad