



MAHARASHTRA STATE ELECTRICITY TRANSMISSION CO.LTD.

(CIN No. U40109MH2005SGC153646)

From:- Executive Engineer (Civil)
EHV Civil Construction cum Maintenances Division Nashik
"Administrative Building", Block No.6, 1st floor, Racca Plot,
Old Saikheda Road, Jail Road, Nashik Road-422 101.
Ph No.:-0253-2403101 (O), Extension Phone No, 0253-2403110
E-Mail ID :ee5710@mahatransco.in Website: www.mahatransco.in

Ref. No. EEC/EHV/CCCM Dn/NSK/Tec

No - 1162

Date:-

01 NOV 2021

e- Quotation

Sealed and superscripted e- quotations are invited for the work of "Land development work for the open Gym at Administrative Building, Racca Plot, Jail Road, Nashik Road, Nashik." As detailed in schedule "B" is enclosed herewith subject to following terms and conditions.

Name of Work:- Land development work for the open Gym at Administrative Building, Racca Plot, Jail Road, Nashik Road, Nashik.

The quotations should reach to this office on or before **08/11/2021** up to 15.00 Hrs.

- 1) The rates [percentage] should be quoted on Firm Quotation basis (Two Bid System only) including cost of materials, labours & T&P etc. required for execution of the work.
 - (a) **Compulsory Primary Documents in 1st Envelop:(Technical Bid)**
 - (i) Valid Certificate of Registration of appropriate class for Civil works from PWD /MES/ Railways/ Jeevan Pradhikaran ETC.OR From Any Govt. / Central Government
 - (ii) GST/ GSTIN Registration Certificate..
 - (iii) PAN Card
 - (iv) E.P.F. Registration Certificate – issued by competent authority of Govt.
 - (v) Experience of having successfully completed civil works or of similar nature.
 - (vi) Payment of EMD Rs. 3000.00 to be made by bidder off-line only upto 14.00 hrs of **08/11/2021** in the office of EE(C), Dn., Nashik. EMD details Amount and M.R. No. should be super-scribed on the Envelope.
 - (b) **Documents in 2nd Envelop:(Price Bid)**
 - i) Price bid only where in the rates/percentage should be quoted in figures as well as in words.

NOTE:- Envelop No.2 (Price Bid) will be opened after qualifying in (Technical Bid) Envelop No.1

- 2) The quantities enumerated in here attached Schedule B are approximate, however the payment will be made against actual executed quantities on site.
- 3) The work should be completed within **15 Days** or expiry of work order whichever is earlier from the date of handing over the site to commence the work, failing of which a penalty at ½% per week subject to the maximum 10% of the ordered value will be imposed.
- 4) The work should be strictly carried out as per standard specifications & up to the entire satisfaction of the Engineer-in-charge.

- 5) No materials will be supplied by the MSETCL for this work except materials as shown in Schedule B
- 6) Payment will be made through First & Final bill/ R.A. bill basis at the discretion of undersigned.
- 7) The contractor will have to pay security deposit to this office equal to 5% of the ordered value.
- 8) In case any accident occurred to the Contractor's labour/workmen during execution of work, the contractor will be fully responsible for all claims & compensation. No charge in any case will be borne by the MSETCL
- 9) The materials to be utilized for the work should be getting approved from the Engineer-in-charge prior to its utilization for the work.
- 10) The terms & conditions enumerated in the approved Booklet "TENDER AND CONTRACTOR FOR WORKS" will be applied in this case & will be binding on the contractor entirely.
- 11) Right to accept any or to reject any or all the quotations without assigning any reason there of is reserved by the undersigned.
- 12) Payment will be released to agency as per availability of funds. Further MSETCL will not pay any compensation due to non availability of funds.

Yours faithfully,



(V. M. Dhore)
Executive Engineer (Civil)
EHV Civil CCM Dn. Nashik.

Copy s.w.r.t.-

- 1) The Superintending Engineer (Civil) EHV CCCM Circle, Nashik.

Copy to-

- 1) Additional Executive Engineer (Civil) EHV CCCM Sub Division Nashik-I.
- 2) Dy. Manager (F&A) EHV CCCM Division Nashik.
- 3) Master File/Notice Board.

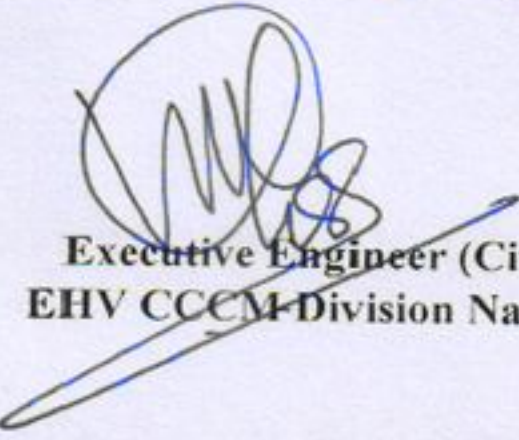
MAHARASTRA STATE ELECTRICITY TRANSMISSION CO. LTD
EHV CIVIL CONSTRUCTION DIVISION, NASHIK

Name of work:-Land development work for the open Gym at Administrative Building, Racca Plot, Jail Road, Nashik Road, Nashik

SCHEDULE 'B'

No.	Description of Item	Quantity	Unit	Rate	GST 18 %	Total	Amount
1	Trimming of grass, shrubs and weeds from the sub station yard and shoulders/berms and disposing off the same to suitable locations etc. complete	432.00	Sqm.	8.00	1.44	9.44	4078.08
2	Excavation for foundation in earth, soil of all types, sand, gravel and soft murum, including removing the excavated material up to a distance of 50 m. beyond the building area and stacking and spreading as directed, dewatering, preparing the bed for the foundation and necessary back filling, ramming, watering including shoring and strutting etc. complete. (Lift upto 3.00 m.) By Manual Means	1.00	Cum	246.00	44.28	290.28	290.28
3	Excavation for foundation in hard murum including removing the excavated material upto distance of 50 metres beyond the building area and stacking and spreading as directed, dewatering, preparing the bed for the foundation and necessary back filling, ramming, watering including shoring and strutting etc. complete. (Lift upto 1.50 m) By Manual Means	1.00	Cum	375.00	67.50	442.50	442.50
4	Supplying hard murum/ kankar at the road site, including conveying and stacking complete.	134.00	Cum	1049.00	188.82	1237.82	165867.88
5	Spreading hard murum, soft murum, stone dust in yard / for road work etc. complete	134.00	Cum	78.00	14.04	92.04	12333.36
6	Compacting the hard murum side widths including laying in layers on each side with vibratory roller including artificial watering etc. complete.	432.00	Sqm.	20.00	3.60	23.60	10195.20
7	Providing dry/ trap/ granite/ quartzite/ gneiss rubble stone soling 15 cm to 20 cm thick including hand packing and compacting etc. complete.	1.00	Cum	2261.00	406.98	2667.98	2667.98
8	Providing and laying in situ cement concrete of 1:4:8 proportion with trap/ granite/ quartzite/ gneiss metal in foundation including necessary form work, compacting and curing etc. complete. (with reversible drum type mixer with / without SCADA with fine aggregates of required specifications (VSI sand finely washed etc)	1.00	Cum	6604.00	1188.72	7792.72	7792.72
9	Providing and laying Cast in situ/Ready Mixcement concrete in M20 of trap/ granite/quartzite/gneiss metal for steps including steel centering, formwork, laying/pumping, compacting, roughening them if special finish is to be provided, finishing uneven and honeycombed surface and curing etc. complete. The Cement Mortar 1:3 plaster is considered for rendering uneven and honeycombed surface, only. Newly laid concrete shall be covered by gunny bag, plastic, tarpaulin etc. (Wooden centering will not be allowed.), with fully automatic micro processor based PLC with / without SCADA enabled reversible Drum Type mixer/ concrete Batch mix plant (Pan mixer) etc. complete. With fine aggregate (Crushed sand VSI Grade)	1.00	Cum	7184.00	1293.12	8477.12	8477.12

No.	Description of Item	Quantity	Unit	Rate	GST 18 %	Total	Amount
10	Providing and fabricating structural steel work in rolled sections like joists, channels, angles, tees etc. as per detailed design and drawings or as directed including cutting, fabricating, hoisting, erecting, fixing in position making riveted / bolted /welded connections without connecting plates, braces etc. and including one coat of anticorrosive paint and over it two coats of oil painting of approved quality and shade etc. complete.	0.01	M.T	94576.00	17023.68	111599.68	1116.00
11	Conveying materials obtained from excavation / cutting including all lifts, laying in layers 20 cm to 30cm, breaking clods, dressing to the required lines, curves, grades and section for a lead of over 300m.to 500m from the site of excavation to the site of deposition as directed. Spec. No.: MORTH 305	1.00	Cum	182.00	32.76	214.76	214.76
12	Providing fly ash brick masonry with conventional / I.S. type fly ash bricks in C.M. 1:6 in foundation and plinth including bailing out water manually striking joints, racking out joints watering and scaffolding etc. complete.	1.50	Cum	7634.00	1374.12	9008.12	13512.18
13	Providing internal cement plaster 12mm thick in single coat in cement mortar 1:4 without neeru finish to concrete or brick surfaces, in all positions including scaffolding and curing etc. complete.	2.00	Sqm.	290.00	52.20	342.20	684.40
14	Providing service of Mazdoor unskilled (heavy male) on daily basis and as per requirement of Engineer Incharge and carrying out the work as directed etc complete	6.00	No	676.00	121.68	797.68	4786.08
15	Providing Hydraulic Excavator Wheeled (8 to 10 T JCB) for excavation, levelling, removing small...etc and carrying out the work as per the instruction of engineer Incharge etc comp	1.00	Hour	1129.00	203.22	1332.22	1332.22
16	Providing,Suppling & fixing garware or equivalent make Net of 2.5 mm Thick and size 50X50MM square for cricket ball safety including tightenng with U.V threaded green rope which include transportation, labour charges , if required the scaffolding, cleaning the area etc As directed by engineet in-charge	144.00	Sqm.	386.00	69.48	455.48	65589.12
Total Rs.							299379.88
Say Rs.							299380.00


 Executive Engineer (Civil)
 EHV CCCM Division Nashik.

I / We hereby agree to carryout the above work as under :-

- At estimated cost.
- Above.....% in words.....Of Estimated cost in Schedule "B"
- Below.....% in words.....Of Estimated cost in Schedule "B"

I/ We have read the instructions and the same are binding on me / us.

Signature of the Contractors & Address.