



MAHARASHTRA STATE ELECTRICITY TRANSMISSION CO.LTD.

(CIN No. U40109MH2005SGC153646)

From:- Executive Engineer (Civil)
EHV Civil Construction cum Maintenance Division Nashik
"Administrative Building", Block No.6, 1st floor, Racca Plot,
Old Saikheda Road, Jail Road, Nashik Road-422 101.
Ph No.:-0253-2403101 (O), Extension Phone No, 0253-2403110
E-Mail ID : ee5710@mahatransco.in Website: www.mahatransco.in

Ref. No. EEC/EHV/CCCM Dn/NSK/Tech-

No - 2027

Date:-

24 NOV 2021

e- Quotation

Sealed and superscripted e- quotations are invited for the work of "**Work of partition and electrification work at office of the Additional Executive Engineer, Sub station maintenance Sub Division Ambad (Newly sanctioned post), Nashik Tal & Dist:- Nashik.**" As detailed in schedule "B" is enclosed herewith subject to following terms and conditions.

Name of Work:- Work of partition and electrification work at office of the Additional Executive Engineer, Sub station maintenance Sub Division Ambad (Newly sanctioned post), Nashik Tal & Dist:- Nashik.

The quotations should reach to this office on or before **30/11/2021** up to 15.00 Hrs.

- 1) The rates [percentage] should be quoted on Firm Quotation basis (Two Bid System only) including cost of materials, labours & T&P etc. required for execution of the work.

(a) Compulsory Primary Documents in 1st Envelop:(Technical Bid)

- (i) Valid Certificate of Registration of appropriate class for Civil works from PWD /MES/ Railways/ Jeevan Pradhikaran ETC.OR From Any Govt. / Central Government
- (ii) GST/ GSTIN Registration Certificate..
- (iii) PAN Card
- (iv) E.P.F. Registration Certificate – issued by competent authority of Govt.
- (v) Experience of having successfully completed civil works or of similar nature.
- (vi) Payment of **EMD Rs. 3000.00** to be made by bidder off-line only upto 14.00 hrs of **30/11/2021** in the office of EE(C), Dn., Nashik. EMD details Amount and M.R. No. should be super-scribed on the Envelope.

(b) Documents in 2nd Envelop:(Price Bid)

- i) Price bid only where in the rates/percentage should be quoted in figures as well as in words.

NOTE:- Envelop No.2 (Price Bid) will be opened after qualifying in (Technical Bid) Envelop No.1

- 2) The quantities enumerated in here attached Schedule B are approximate, however the payment will be made against actual executed quantities on site.
- 3) The work should be completed within **15 Days** or expiry of work order whichever is earlier from the date of handing over the site to commence the work, failing of which a penalty at ½% per week subject to the maximum 10% of the ordered value will be imposed.

- 4) The work should be strictly carried out as per standard specifications & up to the entire satisfaction of the Engineer-in-charge.
- 5) No materials will be supplied by the MSETCL for this work except materials as shown in Schedule B
- 6) Payment will be made through First & Final bill/ R.A. bill basis at the discretion of undersigned.
- 7) The contractor will have to pay security deposit to this office equal to 5% of the ordered value.
- 8) In case any accident occurred to the Contractor's labour/workmen during execution of work, the contractor will be fully responsible for all claims & compensation. No charge in any case will be borne by the MSETCL
- 9) The materials to be utilized for the work should be getting approved from the Engineer-in-charge prior to its utilization for the work.
- 10) The terms & conditions enumerated in the approved Booklet "TENDER AND CONTRACTOR FOR WORKS" will be applied in this case & will be binding on the contractor entirely.
- 11) Right to accept any or to reject any or all the quotations without assigning any reason there of is reserved by the undersigned.
- 12) Payment will be released to agency as per availability of funds. Further MSETCL will not pay any compensation due to non availability of funds.

Yours faithfully,



(V. M. Dhore)

Executive Engineer (Civil)
EHV Civil CCM Dn. Nashik.

Copy s.w.r.t.-

- 1) The Superintending Engineer (Civil) EHV CCCM Circle, Nashik.

Copy to-

- 1) Additional Executive Engineer (Civil) EHV CCCM Sub Division Nashik-I.
- 2) Dy. Manager (F&A) EHV CCCM Division Nashik.
- 3) Master File/Notice Board.

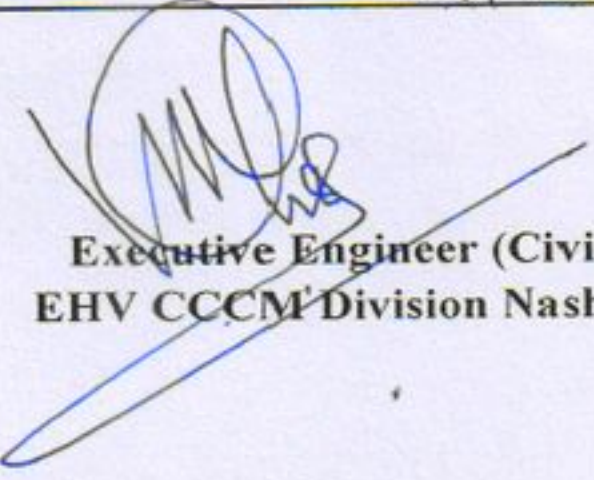
MAHARASTRA STATE ELECTRICITY TRANSMISSION CO. LTD
EHV CIVIL CONSTRUCTION DIVISION, NASHIK

Name of work:-Work of partition and electrification work at office of the Additional Executive Engineer, Sub station maintenance Sub Division Ambad (Newly sanctioned post), Nashik Tal & Dist:- Nashik

SCHEDULE 'B'

No.	Description of Item	Qty	Unit	Rate	Add GST 18%	Total Rate	Amount
Part I							
1	Providing and fixing false ceiling of 10 to 12 mm thick decorative boards of fibrous plaster of paris including scaffolding if necessary all architectural work like mouldings, cornices, coves, domes, cups as per detailed drawings and three coats of spray painting to boards etc. complete. (excluding frame work, runners and mild steel suspenders).	11.00	Square Metre	1200.00	216.00	1416.00	15576.00
2	Providing and fixing false ceiling of 12mm thick as per drawings including powder coated G.I. wall angle of 20mm x 20mm size, G.I. grid runners of size 20mm x 38mm at 600mm center to center both ways and suspended using G.I. 3mm wire including fixing using butterfly clips and fasteners including transporting, scaffolding all necessary labour and machinery, finishing etc. complete.	11.00	Square Metre	1525.00	274.50	1799.50	19794.50
3	Providing and fixing in position, Single shuttered aluminium extruded powder coated openable door of overall size 0.90 m x 2.40 m with aluminium door frame of powder coated section 101.60 x 44.75mm, 3.18 mm thick and shutter comprising of powder coated section having bottom and lock rail of size 150 mm x 44.5mm x 3.00 mm thick top rails 47.62 x 44.45 mm x 3.00 mm thick, vertical style 47.62 x 44.45 mm, 3.00 mm thick and for shutter plain glass panes 5 mm thick for top panels and drawing or as directed by engineer incharge including all materials, labours, and equipment etc. complete	2.00	Square Metre	8944.00	1609.92	10553.92	21107.84
4	Providing and fixing in position anodised extruded aluminum partitions, partly glazed and partly laminated having frame made out of extruded tubular section of size 40mm x 60mm with 12 mm thick three layer ed flat pressed teak wood particle board bonded with BWP type exterior grade phenol formaldehydesynthetic resins in conforming to IS 128231990, laminated on both sides, Nova teak or equivalent and 5mm thick selected quality plain/float glass panels fixed with aluminum glass clips 12mmx12mm and rubber cushioning beading to glass partitions as per approved drawing etc. complete.	5.00	Square Metre	3274.00	589.32	3863.32	19316.60
5	Providing and fixing in position extruded aluminium partitions having frame made out of extruded tubular section of size 65 mm x 40 mm with 12 mm thick three layered flat pressed teak wood particle board bonded with BWP type exterior grade phenol formaldehyde synthetic resin conforming to IS 129231990, laminated on both sides, Novateak or equivalent with aluminium glazing clips of size 12 mm x 12 mm (conical) as per drawing etc. complete. As directed by Engineer in charge.	40.00	Square Metre	3603.00	648.54	4251.54	170061.60
6	Supplying, Providing and fixing Hydraulic door closer... etc complete	1.00	No.	1467.00	264.06	1731.06	1731.06
7	Supplying, Providing and fixing Door Stopper Stainless Steel... etc complete	5.00	No.	177.00	31.86	208.86	1044.30
8	Removing doors and windows with frame sand stacking the materials as directed with all leads, lift etc. complete.	15.00	No.	156.00	28.08	184.08	2761.20
9	Repairing of wooden flush door including cutting of damaged/decayed portion of door, providing 32mm new plywood with both side lamination, over which aluminium sheet with oil paint in 2 coats matching the lamination colour & fixing the flush door including all labour material such as fevicol, nails, screws, bidding patti etc. as per the directives of Engineer incharge.	3.15	Sqm	6027.00	1084.86	7111.86	22402.36
						Total	273795.46

No.	Description of Item	Qty	Unit	Rate	Add GST 18%	Total Rate	Amount
Part II							
1	Supplying & erecting mains with 2x2.5 sq.mm FRLSH copper PVC insulated wire with 1x2.5 sq.mm FRLSH Green colour earth wire laid in provided conduit/trunking/inside pole/Bus bars or any other places as per specification No: WGMA/BW	20.00	Mtr	86.00	15.48	101.48	2029.60
2	Supplying and erecting PVC trunking (PVC casing-n-capping) of size 20 mm with accessories on wall/ceiling as per specification No: WG-MA/CON.	15.00	RMT	36.00	6.48	42.48	637.20
3	Supplying and erecting Ceiling rose / Batten holder / Slanting holder / hanging cord switch / hanging bell push / pendent holder bakelite base 6A. erected on filled polypropylene board or polished double wooden block/ PVC junction box	5.00	EA	35.00	6.30	41.30	206.50
4	Supplying and erecting unbreakable concealed type modular switch box with double mounting plate for 8 module duly erected flush to wall with required chiselling and finishing with cement mortar / POP as per required to match the background.	2.00	EA	481.00	86.58	567.58	1135.16
5	Point wiring for light/fan/bell concealed type in min 20 mm ISI marked HMS PVC conduit with 1.5 sq.mm. (2+1E) FR grade copper wires, modular type switch, earthing and required accessories as per specification No: WG-PW/CW	5.00	Point	641.00	115.38	756.38	3781.90
6	Point wiring for independent plug, concealed type in min 20 mm ISI marked HMS PVC conduit with 1.5 sq.mm (2+1E) FR grade copper wires, modular type switch and socket, earthing and required accessories as per specification No WGPW/ SW	7.00	EA	694.00	124.92	818.92	5732.44
7	Supplying & erecting LED 20W tube light fitting (4 feet) with aluminium housing, heat sink, integrated HF electronic driver complete.	3.00	EA	935.00	168.30	1103.30	3309.90
8	Supplying and erecting square shaped CRCA /die-cast aluminium powder coated housing LED panel light (slim edge-lit) 600x600mm suitable for 36 W-40W with provision for plane front frame with translucent cover fixed to the housing complete.	2.00	EA	3778.00	680.04	4458.04	8916.08
						Total Rs.	25748.78
						Total Part I+II	299544.24
						Say	299544.00


Executive Engineer (Civil)
EHV CCCM Division Nashik.

I / We hereby agree to carryout the above work as under :-

- At estimated cost.
- Above.....% in words.....Of Estimated cost in Schedule "B"
- Below.....% in words.....Of Estimated cost in Schedule "B"

I/ We have read the instructions and the same are binding on me / us.

Signature of the Contractors & Address.