



# MAHARASHTRA STATE ELECTRICITY TRANSMISSION CO.LTD.

(CIN No. U40109MH2005SGC153646)

From:- Executive Engineer (Civil)  
EHV Civil Construction cum Maintenance Division Nashik  
"Administrative Building", Block No. 6, 1<sup>st</sup> floor, Racca Plot,  
Old Saikheda Road, Jail Road, Nashik Road-422 101.  
Ph No.:-0253-2403101 (O), Extension Phone No, 0253-2403110  
E-Mail ID :ee5710@mahatransco.in Website: www.mahatransco.in

Ref. No. EEC/EHV/CCCM Dn/NSK/Tech- No - 70 - Date:- 19 JAN 2022

## e- Quotation

Sealed and superscripted e- quotations are invited for the work of "Various maintenance works at 220 KV Pimpalgaon Sub station, Tal:- Niphad, Dist:- Nashik" As detailed in schedule "B" is enclosed herewith subject to following terms and conditions.

**Name of Work:- Various maintenance at 220 KV Pimpalgaon Sub station, Tal:- Niphad, Dist:- Nashik.**

The quotations should reach to this office on or before **25/01/2022** up to 15.00 Hrs

1) The rates [percentage] should be quoted on Firm Quotation basis (Two Bid System only) including cost of materials, labours & T&P etc. required for execution of the work.

**a) Compulsory Primary Documents in 1<sup>st</sup> Envelop:(Technical Bid)**

(i) Valid Certificate of Registration of appropriate class for Civil works from PWD /MES/ Railways/ Jeevan Pradhikaran ETC.OR From Any Govt. / Central Government.

(ii) PAN card.

(iii) GST/ GSTIN Registration Certificate.

(iv) Experience of having successfully completed similar types of Civil works.

(v) Payment of **EMD Rs. 2185.00** to be made by bidder off-line only upto 14.00 hrs of **25/01/2022** in the office of EE(C), Dn., Nashik. EMD details Amount and M.R. No. should be super-scribed on the Envelope & having registered vendor of MSETCL.

**b) Documents in 2<sup>nd</sup> Envelop:(Price Bid)**

i) Price bid only where in the rates/percentage should be quoted in figures as well as in words.

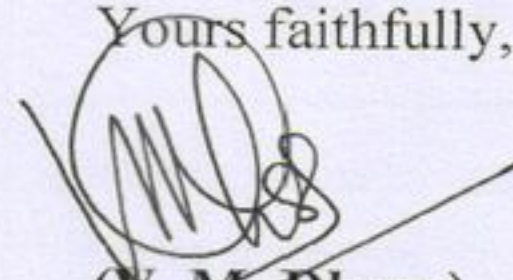
**NOTE:- Envelop No.2 (Price Bid) will be opened after qualifying in (Technical Bid) Envelop No.1**

- 2) The quantities enumerated in here attached Schedule B are approximate, however the payment will be made against actual executed quantities on site.
- 3) The work should be completed within **15 days** from the date of handing over the site to commence the work, failing of which a penalty at ½% per week subject to the maximum 10% of the ordered value will be imposed.
- 4) The work should be strictly carried out as per standard specifications & up to the entire satisfaction of the Engineer-in-charge.
- 5) No materials will be supplied by the MSETCL for this work except materials as shown in Schedule A
- 6) Payment will be made through First & Final bill/ R.A. bill basis at the discretion of undersigned.



- 7) The contractor will have to pay security deposit to this office equal to 5% of the ordered value.
- 8) In case any accident occurred to the Contractor's labour/workmen during execution of work, the contractor will be fully responsible for all claims & compensation. No charge in any case will be borne by the MSETCL
- 9) The materials to be utilized for the work should be getting approved from the Engineer-in-charge prior to its utilization for the work.
- 10) The terms & conditions enumerated in the approved Booklet "TENDER AND CONTRACTOR FOR WORKS" will be applied in this case & will be binding on the contractor entirely.
- 11) Right to accept any or to reject any or all the quotations without assigning any reason there of is reserved by the undersigned.
- 12) Payment will be released to agency as per availability of funds. Further MSETCL will not pay any compensation due to non availability of funds.

Yours faithfully,

  
(V. M. Dhore)  
Executive Engineer [Civil]  
EHV Civil CCM Dn Nashik.

Copy s.w.r.to.-

- 1) The Superintending Engineer (Civil) EHV CCCM Circle, Nashik.

Copy to-

- 1) Additional Executive Engineer (Civil) EHV CCCM Sub Division Nashik-II.
- 2) Dy. Manager (F&A) EHV CCCM Dn. Nashik.
- 3) Master File/Notice Board.



**MAHARASTRA STATE ELECTRICITY TRANSMISSION CO. LTD**  
**EHV CIVIL CONSTRUCTION DIVISION, NASHIK**

Name of work:-Various maintenance works at 220 KV Pimpalgaon Sub station, Tal:- Niphad, Dist:- Nashik

**SCHEDULE 'B'**

Sr No	Description	Qty	Unit	Rate without GST	GST 18%	Rate with GST	Amount
1	2	3	8	4	5	6	7
1	Supplying hard murum/ kankar at the road site, including conveying and stacking complete.	7.500	Cubic Metre	624.24	112.36	736.60	5524.50
2	Spreading hard murum/ soft murrum/ gravel or kankar for side width complete	7.500	Cubic Metre	74.74	13.45	88.19	661.43
3	Removing existing false ceiling sheets and refixing the same including removing bird nest and debris and cleaning etc complete.	143.950	Square Metre	48.73	8.77	57.50	8277.13
4	Conveying materials obtained from various activities for a lead of over 500m to 5km inclusive from the site of loading to the site of deposition as directed by Engineer-inchage etc complete.	25.000	Cubic Metre	190.49	34.29	224.78	5619.50
5	Providing service of sweeper on daily basis and as per requirement of Engineer Inchage and carrying out the work etc complete	10.000	Number	584.79	105.26	690.05	6900.50
6	Providing service of Mazdoor unskilled (heavy male) on daily basis and as per requirement of Engineer Inchage and carrying out the work etc complete	20.000	Number	584.79	105.26	690.05	13801.00
7	Providing, laying and fixing P.V.C. pipe of 110 mm. dia. with fittings such as bends, tees, reducers, clamps, etc. including necessary excavation, trench filling etc. complete. Including removing existing pipe line if necessary and conveying and stacking the same in PWD chowky or as directed etc. complete.	2.000	Running Metre	540.35	97.26	637.61	1275.22
8	Excavation for foundation in earth, soil of all types, sand, gravel and soft murum, including removing the excavated material up to a distance of 50 m. beyond the building area and stacking and spreading as directed, dewatering, preparing the bed for the foundation and necessary back filling, ramming, watering including shoring and strutting etc. complete. (Lift upto 3.00 m.) By Manual Means	8.160	Cubic Metre	234.32	42.18	276.50	2256.24
9	Excavation for foundation in hard murum and boulders including removing the excavated material up to a distance 50 metres, beyond the building area and stacking and spreading as directed, dewatering, preparing the bed for the foundation and necessary back filling, ramming, watering including shoring and strutting etc. complete. (Lift upto 1.5m.) By Mechanical Means	8.640	Cubic Metre	237.35	42.72	280.07	2419.80
10	Providing and laying in situ cement concrete of 1:4:8 proportion with trap/ granite/ quartzite/ gneiss metal in foundation including necessary form work, compacting and curing etc. complete. (with reversible drum type mixer with SCADA with fine aggregates of required specifications ( VSI sand finely washed etc )	4.080	Cubic Metre	6483.02	1166.94	7649.96	31211.84



Sr No	Description	Qty	Unit	Rate without GST	GST 18%	Rate with GST	Amount
1	2	3	8	4	5	6	7
11	Providing and laying in situ /Ready Mix cement concrete M 20 of trap / granite /quartzite/ gneiss metal for R.C.C. work in foundations like raft, strip foundations, grillage and footings of R.C.C. columns and steel stanchions etc. including bailing out water, Steel centering formwork, laying/pumping cover blocks, compaction and curing roughening the surface if special finish is to be provided (Excluding reinforcement and structural steel) etc. complete, with fully automatic micro processor based PLC with SCADA enabled reversible Drum Type mixer/ concrete Batch mix plant (Pan mixer) etc. complete. With fine aggregate (Crushed sand VSI Grade)	9.000	Cubic Metre	7358.69	1324.56	8683.25	78149.25
12	Removing damaged PVC flooring and cleaning tiles by using chemical in Control Room	95.340	Sqm	58.48	10.53	69.01	6579.41
13	Removing and refixing Alluminun windows including changing gasket and necessary repairs etc complete	36.450	Sqm	1143.32	205.80	1349.12	49175.42
14	Removing old damaged glass and providing and fixing 5mm tk. plain glass for doors in control room including changing gasket etc complete.	4.521	Sqm	750.23	135.04	885.27	4002.53
15	Reparing of collapsible steel Gate by removing it, welding the required parts and refixing in position as directed by engineer in charge etc complete.	1.000	Number	1966.47	353.96	2320.43	2320.43
Total Rs.							218174.20
Say Rs.							218174.00

  
Executive Engineer (Civil)  
EHV CCEM Dn Nashik.

I / We hereby agree to carryout the above work as under :-

- At estimated cost.
- Above.....% in words.....Of Estimated cost in Schedule "B"
- Below.....% in words.....Of Estimated cost in Schedule "B"

I/ We have read the instructions and the same are binding on me / us.

Signature of the Contractors & Address.